Wholehog® III Operating System

Moving and Conventional Lights

Powerful Programming and Playback

Effects Engine™

NEW! Remote Focus Capability!

Networking Abilities

Timecode and MIDI

Programmer and Playback Wings

Wholehog® II backwards compatible hardware

WHOLEHOG 3 PC

BUILD YOUR OWN LIGHTING CONSOLE.

HOG® 3 PC BRINGS YOU THE CONVENIENCE AND POWER OF THE WHOLEHOG® III OPERATING SYSTEM RUNNING ON A PC.

Flying Pig System's **Hog 3 PC** transfers the functionality of the **Wholehog® III** lighting console to your personal computer. Create your own control solution to meet your particular requirements and budget.

Hog 3 PC offers a cost effective and flexible suite of software and hardware components that combine to produce the system that you need; from the free of charge Hog 3 PC software for viewing and editing Wholehog III shows through to a fully fledged 4,096 channel console.

Use a laptop for a lightweight portable system or a desktop for installations, rackmount if need be; it's up to you.

Hog 3 PC is perfect for automated playback in retail and architectural applications. Hog 3 PC is also the ideal backup solution.

WHOLEHOG 3 PC

CONNECTIVITY

- Offline editor for the Wholehog III system and Hog iPC console

- DMX Output using USB DMX Widgets and/or USB DMX Super Widgets

- Supports one USB programming wing and up to four USB playback wings

- MIDI In/ Out via PC's sound card

- Linear Timecode (LTC) Input Widget provides SMPTE input capabilities

- Connectivity with WYSIWYG and ESP Vision via Ethernet

- Wired and wireless networking ability with multiple Hog3PC computers, Hog iPC, and Wholehog III console systems
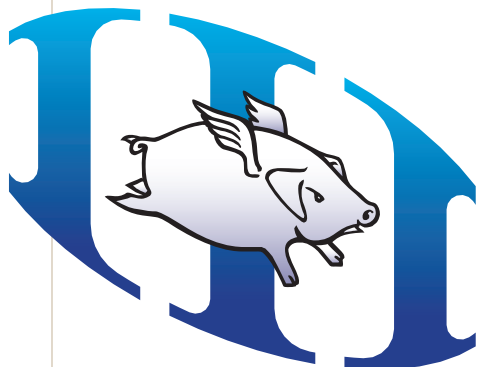
CAPACITIES

- 512 to 4096 DMX-512 channels (depending on number of USB DMX Widgets)

- Unlimited number of simultaneous crossfades

- Thousands of Cues, Cue parts, Cue lists, chases, effects, groups, palettes, pages

- User definable keyboard shortcuts

REMOTE FOCUS

- Hog3PC software is compatible as a Remote Focus device for Wholehog III consoles, rack mount units, Hog iPC consoles and other Hog3PC computers

- Custom user interface allows for optimized functionality when used with a Tablet PC and wireless Ethernet devices.

- Provides freedom to operate all console functions from any location without the burden of cables.

HOG 3 PC MINIMUM SYSTEM REQUIREMENTS

- Windows® XP (Home or Professional)

- Intel Pentium III compatible processor at 1 GHZ or higher

- 256 MB of RAM

- 200 MB hard-disk space

- 1024 x 768 or higher-resolution monitor

HARDWARE

PLAYBACK WING

- Integrated 2 port USB hub
- Rugged, high quality control surface
- 10 faders with playback controls
- Bi-color dimmable LED feedback
- Bi-color LED desklight
- USB or PSU (supplied) powered

PROGRAMMER WING

- Integrated 2 port USB hub
- Rugged, high quality control surface
- 4 encoders, trackball and programming controls
- Main playback controls
- Bi-color LED desklight
- USB or PSU (supplied) powered

SUPER WIDGET

- 4 DMX universes in one Widget
- DMX512-1990/A compliant
- RDM compatible
- Kensington Security Slot

DMX WIDGET

- DMX512-1990/-A compliant
- RDM compatible
- Failsafe DMX frame store
- USB powered

TIMECODE WIDGET

- Balanced audio LTC input
- Film, EBU, NTSC & SMPTE
- Timecode status LEDs
- USB powered

USB HUB WIDGET

- Rugged 4 port USB hub
- USB or PSU (supplied) powered
- Ideal for use in Rack Adaptor (see below)

1U WIDGET RACK ADAPTOR

- Rackmounts 5 Widgets
- 4.5" deep
- Wholehog III rack unit styling